



Critical flow in open channels: Numerical solution using the Newton-Raphson method for Android 4.0 application

Flujo crítico en canales abiertos, solución numérica mediante el método de Newton-Raphson para aplicación Android 4.0

Édgar Orlando Ladino Moreno¹ , César Augusto García-Ubaque² ,
María Camila García-Vaca³ 

Cómo citar: Ladino-Moreno, E.O., García-Ubaque, C.A. y García-Vaca, M.C. (2020). Critical flow in open channels: Numerical solution using the Newton-Raphson method for Android 4.0 application. *Tecnura*, 24(63) 88-103. DOI: <https://doi.org/10.14483/22487638.16196>

Fecha de recepción: 10 de junio de 2019

Fecha de aceptación: 18 de octubre de 2019

ABSTRACT

Context: In this article we present an algorithm under JavaScript source code for critical flow equation solution.

Method: An object-oriented programming language was implemented for Android 4.0 or higher systems based on iterative and incremental processes (Agile development). The numerical method of Newton-Raphson was used to determine the critical depth of seven hydraulic sections (rectangular, trapezoidal, asymmetric trapezoidal, triangular, asymmetric triangular, parabolic and circular). A potential function was obtained to establish the seed value in iterative process, in order to accelerate and guarantee the convergence level for each

section. This value is directly associated with hydraulic problem pre-established conditions.

Results: The application calculates: critical depth, critical speed, hydraulic area, specific energy, wet perimeter and mirror. The results calculated by the application were validated against Excel analysis tool (Goal Seek) results and Hcanales[®] software developed by Máximo Villón Béjar Engineer. Finally, the application is available for free in Google Play Store, with the name "Critical Flow in Channels. Newton Raphson Solution".

Conclusions: It is possible to develop easily accessible applications that meet the technical conditions required for the resolution of engineering-related situations.

Keywords: application software, educational software, water flow, fluid dynamics, JavaScript code.

- 1 Civil Engineer, Universidad Militar Nueva Granada. Topographic Engineer, Universidad Distrital Francisco José de Caldas, Colombia. MSc Civil Engineering, Escuela Colombiana de Ingeniería, Colombia. Associated Profesor asistente, Universidad Distrital Francisco José de Caldas. Contacto: edgar.ladino@unimilitar.edu.co. ORCID: <https://orcid.org/0000-0002-7770-452X>
- 2 Civil Engineer, Universidad Nacional de Colombia, Colombia. MSc Civil Engineering, Universidad de los Andes, Colombia. PhD in Engineering, Universidad de los Andes, Colombia. Titular Professor Universidad Distrital Francisco José de Caldas, Colombia. Contacto: cagarciav@udistrital.edu.co. ORCID: <https://orcid.org/0000-0002-6959-6610>
- 3 Chemical Engineer, Universidad de los Andes, Colombia. MSc Chemical Engineering, Universidad de los Andes, Colombia. Professor Universidad Católica de Colombia, Colombia. Contacto: mgarciav@ucatolica.edu.co. ORCID: <https://orcid.org/0000-0002-1382-7387>

RESUMEN

Contexto: En este artículo se presenta el desarrollo de un algoritmo bajo código fuente JavaScript para la solución de la ecuación de flujo crítico.

Método: Se implementó un lenguaje de programación orientado a objetos para sistemas Android 4.0 o superiores, a partir de procesos iterativos e incrementales (desarrollo ágil). Se utilizó el método numérico de Newton-Raphson para determinar la profundidad crítica de siete secciones hidráulicas (rectangular, trapezoidal, trapezoidal asimétrico, triangular, triangular asimétrico, parabólico y circular). Con el propósito de acelerar y garantizar el nivel de convergencia para cada sección, se obtuvo una función potencial para establecer el valor semilla en el proceso iterativo; dicho valor se asocia de forma directa a las condiciones preestablecidas del problema hidráulico.

Resultados: La aplicación calcula la profundidad crítica, velocidad crítica, área hidráulica, energía específica, perímetro mojado y el espejo. Los resultados fueron validados contra los obtenidos por medio de la herramienta para análisis de Excel (buscar objetivo) y por el software Hcanales® desarrollado por el ingeniero Máximo Villón Béjar. Finalmente, la aplicación se encuentra disponible de forma gratuita en Play Store (Google), con el nombre de "Flujo Crítico en Canales. Solución Newton Raphson".

Conclusiones: Es posible desarrollar aplicaciones de fácil acceso que cumplan con las condiciones técnicas requeridas para la resolución de situaciones relacionadas con ingeniería.

Palabras clave: código JavaScript, dinámica de fluidos, flujo de agua, programa informático, programa informático didáctico.

INTRODUCTION

Teaching and learning ways must be in line with technological developments that are experienced today (Contreras, Escobar, & Tristancho, 2013; Sotelo & Solarte, 2014). The generation of different learning scenarios leads the student to relate the influence of diverse variables and methodologies in real problems solution (Gómez, Galvis, & Mariño, 1998). In this sense, applications development for smartphones, becomes an attractive alternative (Gasca, Camargo, & Medina, 2014), when they are oriented to educational processes (Jonoski et al., 2012). Educational software (ES), are defined as applications or computer programs that facilitate the teaching-learning process (Vidal, Gómez, & Ruiz, 2010; Drumea, 2012). In the free-flowing hydraulic field, most equations that describe the flow behavior do not resist an analytical development, due mainly, to the non-linearity of the functions. Which requires

numerical methods implementation that solve the hydraulic problem iteratively (Diaz & Benitez, 1998). In real flow problems it is necessary to use successive approximation methods (Vidal, Gómez, & Ruiz, 2010). The developed algorithm calculates the critical depth from the numerical method of Newton-Raphson, for 5 successive iterations, based on a preset seed value, which accelerates the convergence.

Critical Flow

The Froude Number relates the speed, the geometric parameters of the section and the gravitational effects. The critical depth of the flow is defined as the condition for which, the Froude Number (FN) is equal to 1, where the specific energy is minimal (equation 1). If $FN < 1$, a subcritical flow is established, and if $FN > 1$, the flow is supercritical (Figure 1).

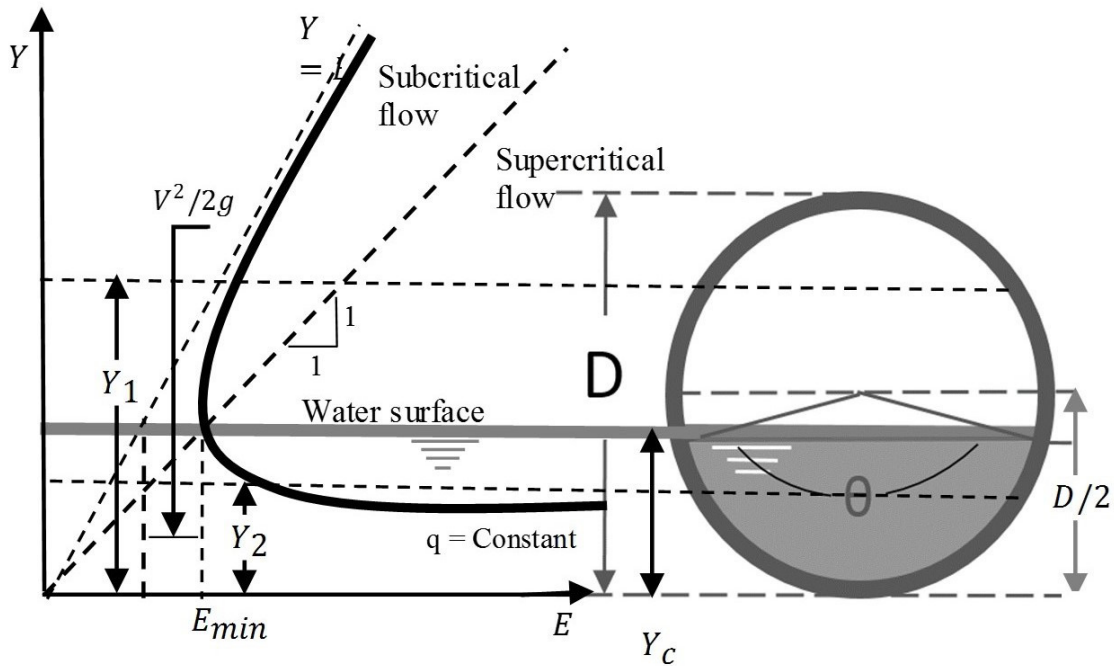


Figure 1. Specific energy diagram

Source: Authors.

Froude:

$$NF = \frac{V}{\sqrt{g \frac{A}{T}}} \quad (1)$$

Where: V = Speed (m/s); A = Hydraulic area (m^2); T = Mirror (m); g = Gravity (m/s^2).

Function:

$$f(Y_c) = gA^3T^{-1} - Q^2 = 0 \quad (2)$$

Where: Q = Flow (m^3/s); A = Hydraulic area (m^2); T = Mirror (m); g = Gravity (m/s^2).

Derivative:

$$f'(Y_c) = g \left[-A^3T^{-2} \frac{dT}{dY_c} + 3T^{-1}A^2 \frac{dA}{dY_c} \right] \quad (3)$$

Newton Raphson Approach:

$$Y_{c_{n+1}} = Y_{c_n} - \frac{f(Y_{c_n})}{f'(Y_{c_n})} \quad (4)$$

METHODOLOGY

For the application development we used iterative and incremental processes (Agile Development), in three specific phases:

- In the first phase, the flow diagram of the iterative process for each of the hydraulic sections (rectangular, trapezoidal, trapezoidal asymmetric, triangular, triangular asymmetric, parabolic and circular) was established.
- In the second phase, the source code (JavaScript) was developed (Lindley, 2013).
- For the last phase, the application was validated by comparing the results against the values obtained by Excel analysis tool (Goal Seek) and by Hcanales® software.

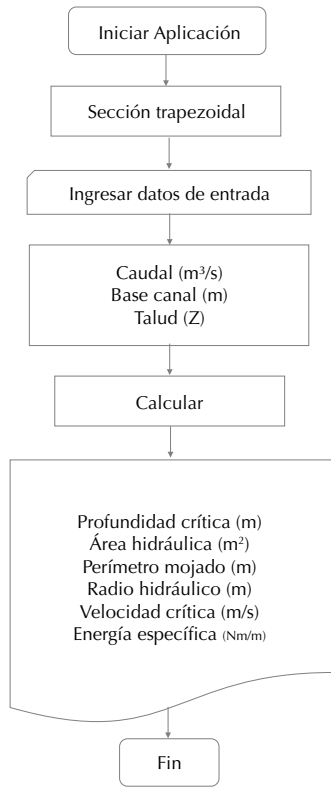


Figure 2. Application flow diagram for the user interface (trapezoidal channel)
 Source: Authors.

The algorithm shown in Figure 3, was used to program the solution for trapezoidal channel.

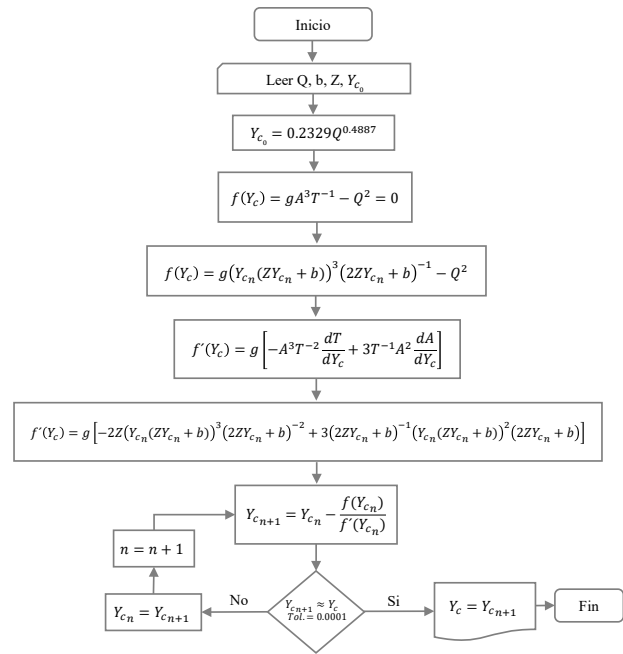


Figure 3. Flow diagram for calculating critical depth (trapezoidal channel)
 Source: Authors.

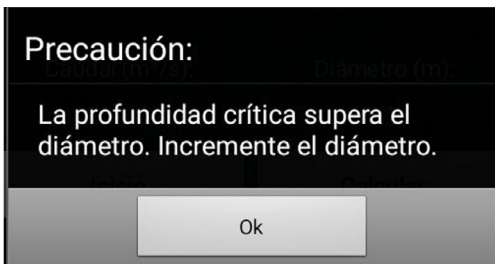


Figure 4. Caution message (circular section)
 Source: Authors.

The flow chart for the user interface is presented below, which varies according to the selected hydraulic section (Figure 2).

In case of a circular section, the height of critical depth exceeds the diameter value, the application generates a warning, where it is recommended to increase the diameter.

RESULTS

Trapezoidal Channel

When you start the application, a menu with seven options of hydraulic sections is displayed (rectangular, trapezoidal, asymmetric trapezoidal, triangular, asymmetric triangular, parabolic and circular). For each section, the algorithm calculates: critical depth, mirror, hydraulic radius, specific energy, flow type, hydraulic area, wet perimeter, critical flow velocity and the Froude number. In order to validate the application, it is proposed to determine the critical depth for a symmetric trapezoidal channel (figure 5), by means of three different methodologies: Newton Raphson, Goal Seek (Excel) and Hcanales®. Hydraulic channel conditions are in Table 1.

Table 1. Input parameters trapezoidal channel

Flow (m ³ /s):	12.25
Base channel (m):	2.25
Talud (Z):	3.5

Source: Authors.

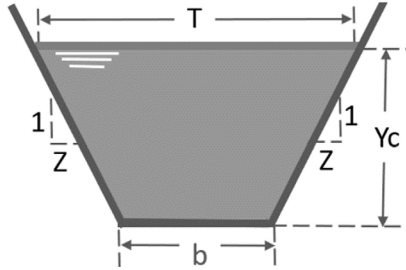


Figure 5. Trapezoidal channel.
 Source: Authors.

Hydraulic area:

$$A = Y_c(ZY_c + b) \quad (5)$$

Wet perimeter:

$$P = 2Y_c\sqrt{Z^2 + 1} + b \quad (6)$$

Hydraulic radius:

$$R = \frac{Y_c(ZY_c + b)}{Y_c\sqrt{Z^2 + 1} + b} \quad (7)$$

Mirror:

$$T = 2ZY_c + b \quad (8)$$

Specific Energy:

$$Ee = Y_c + \frac{V^2}{2g} \quad (9)$$

Considering (1), (2) and (3), we obtain:

Derivative hydraulic area:

$$\frac{dA}{dY_c} = 2ZY_c + b \quad (10)$$

Mirror derivative:

$$\frac{dT}{dY_c} = 2Z \quad (11)$$

Approach Newton Raphson:

$$Y_{c_{n+1}} = Y_{c_n} \quad (12)$$

$$-\frac{g(Y_{c_n}(ZY_{c_n} + b))^3(2ZY_{c_n} + b)^{-1} - Q^2}{g[-2Z(Y_{c_n}(ZY_{c_n} + b))^3(2ZY_{c_n} + b)^{-2} + 3(2ZY_{c_n} + b)^{-1}(Y_{c_n}(ZY_{c_n} + b))^2(2ZY_{c_n} + b)]}$$

In the case of symmetric trapezoidal channel, the following function is proposed for seed value:

$$f(Y_c) = 0.2329Q^{0.4887} \quad (13)$$

Where: Q = Flow rate (m³/ s); Y_c = Critical depth (m).

Tabla 2. Critical depth calculation (Excel, Newton-Raphson), (trapezoidal channel)

Iter.	Yc n+1	Area (m ²)	T (m)	dA/dYc	dT/dYc	f(Yc)	f'(Yc)	Newton Raphson
1	0.79239	3.98050	7.79676	7.7968	7.000	-70.7087	395.05587	0.971379
2	0.97138	5.48812	9.04965	9.0497	7.000	29.1251	747.81227	0.932432
3	0.93243	5.14097	8.77702	8.7770	7.000	1.8024	656.70487	0.929687
4	0.92969	5.11691	8.75781	8.7578	7.000	0.0084	650.60865	0.929674
5	0.92967	5.11680	8.75772	8.7577	7.000	0.0000	650.58016	0.9297

Source: Authors.

```
Sub Calculo_Yc_Trapezoidal_simetrico()
' Calcula El tirante critico para la seccion trapezoidal simétrico
    Range("l19").GoalSeek Goal:=0, ChangingCell:=Range("ab18")
End Sub
```

Figure 6. Visual Code (Excel). Iteration for Yc calculation (symmetric trapezoidal channel)

Fuente: Authors.

The results obtained from these three methodologies, generate the same value for the critical depth, under the initial conditions established.

Table 3. Comparison of Yc results (trapezoidal channel)

Parameter	Excel		HCanales (Software)	Application (JavaScript)
	Goal Seek	Newton Raphson		
Critical depth (m):	0.9297	0.9297	0.9297	0.9297
Mirror (m):	8.7577	8.7577	8.7577	8.7577
Hydraulic radius (m):	0.5674	0.5674	0.5674	0.5674
Specific energy (Nm/N):	1.2218	1.2218	1.2218	1.2218
Hydraulic area (m ²):	5.1168	5.1168	5.1168	5.1168
Perimeter (m):	9.0181	9.0181	9.0181	9.0181
Critical speed (m/s):	2.3941	2.3941	2.3941	2.3941
Froude number:	1.0000	1.0000	1.0000	1.0000

Source: Authors.

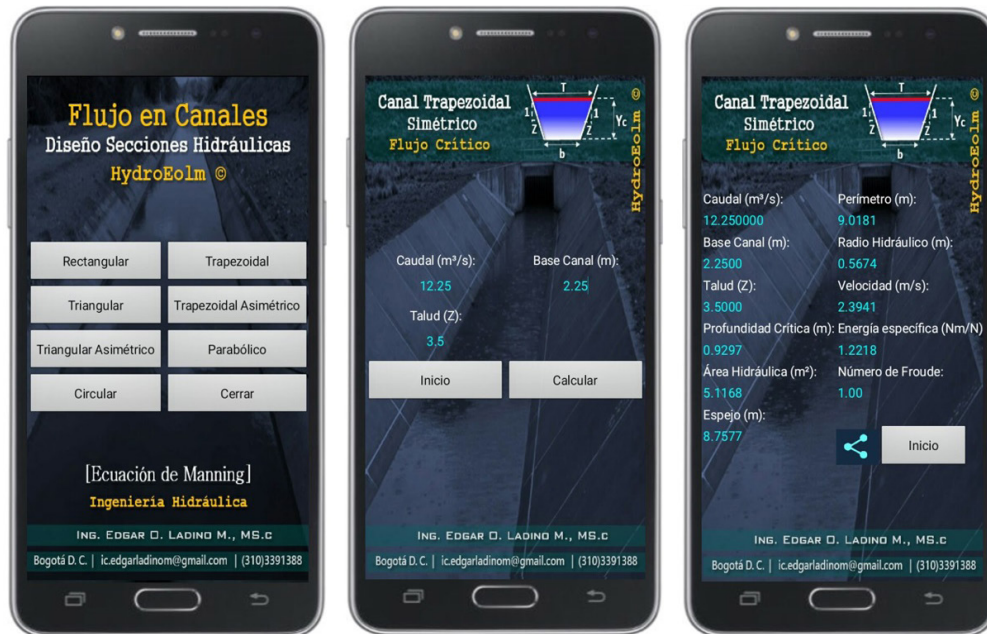


Figure 7. Trapezoidal channel, (Application solution for critical depth)
Fuente: Authors.

Asymmetric Trapezoidal Channel

Considering (1), and with the purpose of verifying the capacity of the application for critical depth calculation, we proposed an asymmetric trapezoidal section, with these hydraulic conditions:

Table 4. Input parameters asymmetric trapezoidal channel

Flow (m ³ /s):	1.75
Base channel (m):	1.2
Talud (ZA):	5
Talud (ZB):	2

Source: Authors.

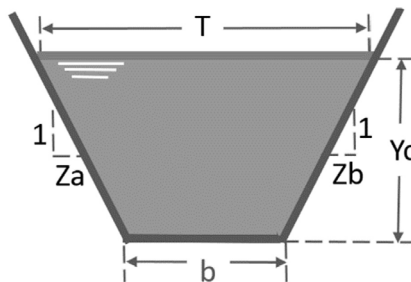


Figure 5. Trapezoidal channel.
Source: Authors.

Hydraulic area:

$$A = 0.5(Z_a Y_c^2 + 2b Y_c + Z_b Y_c^2) \quad (14)$$

Wet perimeter:

$$P = Y_c \sqrt{Z_a^2 + 1} + b + Y_c \sqrt{Z_b^2 + 1} \quad (15)$$

Hydraulic radius:

$$R = \frac{0.5(Z_a Y_c^2 + 2b Y_c + Z_b Y_c^2)}{Y_c \sqrt{Z_a^2 + 1} + b + Y_c \sqrt{Z_b^2 + 1}} \quad (16)$$

Mirror:

$$T = Z_a Y_c + b + Z_b Y_c \quad (17)$$

Hydraulic area derivative:

$$\frac{dA}{dY_c} = Z_a Y_c + b + Z_b Y_c \quad (18)$$

Mirror derivative:

$$\frac{dT}{dY_c} = Z_a + Z_b \quad (19)$$

From equations (2), (3) and (4), we can conclude that:

Newton Raphson Approach: (20)

$$f(Y_{c_n}) = g \left(0.5(Z_a Y_{c_n}^2 + 2b Y_{c_n} + Z_b Y_{c_n}^2) \right)^3 (Z_a Y_{c_n} + b + Z_b Y_{c_n})^{-1} - Q^2 \quad (21)$$

$$f'(Y_{c_n}) = g \left[- \left(0.5(Z_a Y_{c_n}^2 + 2b Y_{c_n} + Z_b Y_{c_n}^2) \right)^3 (Z_a Y_{c_n} + b + Z_b Y_{c_n})^{-2} (Z_a + Z_b) + 3(Z_a Y_{c_n} + b + Z_b Y_{c_n})^{-1} \left(0.5(Z_a Y_{c_n}^2 + 2b Y_{c_n} + Z_b Y_{c_n}^2) \right)^2 (Z_a Y_c + b + Z_b Y_c) \right]$$

For the asymmetric trapezoidal channel, a potential function was implemented: critical depth vs. flow, for the initial value (seed value). This function accelerates the numerical method convergence. The visual code used in Excel is shown in [Figure 9](#).

$$f(Y_c) = 0.2379Q^{0.5045} \quad (22)$$

Table 5. Critical depth calculation (Excel, Newton-Raphson) (Asymmetric trapezoidal channel)

Iter.	Yc n+1	Area (m ²)	T (m)	dA/dYc	dT/dYc	f(Yc)	f'(Yc)	Newton Raphson
1	0.31551	0.7270	3.4085	3.4085	7.000	-1.9566	13.28386	0.462796
2	0.46280	1.3049	4.4395	4.4396	7.000	1.8482	42.37605	0.419181
3	0.41918	1.1180	4.1342	4.1343	7.000	0.2535	31.17162	0.411050
4	0.41105	1.0846	4.0773	4.0773	7.000	0.0075	29.35139	0.410796
5	0.41080	1.0835	4.0755	4.0756	7.000	0.0000	29.29582	0.4108

Source: Authors.

```
Sub Calculo_Yc_Trapezoidal_Asimetrico()
' Calcula El tirante critico para la seccion trapezoidal asimétrica
Range("t19").GoalSeek Goal:=0, ChangingCell:=Range("ab18")
End Sub
```

Figure 9. Visual code (Excel). Iteration for Yc calculation. (Asymmetric trapezoidal channel)

Fuente: Authors.

Table 6. Comparison of Y_c results (Asymmetric trapezoidal channel)

Parameter	Excel		HCanales (Software)
	Goal Seek	Newton Raphson	
Critical depth (m):	0.4108	0.4108	0.4108
Mirror (m):	4.0756	4.0756	4.0756
Hydraulic radius (m):	0.2572	0.2572	0.2572
Specific energy (Nm/N):	0.5437	0.5437	0.5437
Hydraulic area (m ²):	1.0836	1.0836	1.0836
Perimeter (m):	4.2132	4.2132	4.2132
Critical speed (m/s):	1.6150	1.6150	1.6150
Froude number:	1.0000	1.0000	1.0000

Source: Authors.



Figure 10. Asymmetric trapezoidal channel (Application critical depth solution)

Fuente: Authors.

Circular Channel

To evaluate the Application results, we present the following hydraulic problem:

Table 7. Input parameters circular channel

Flow (m ³ /s):	0.145
Diameter (m):	0.4

Source: Authors.

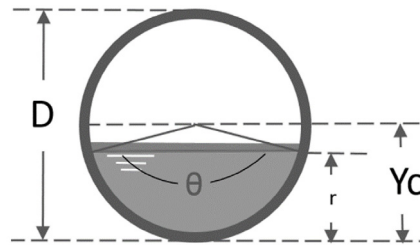


Figure 11. Circular channel
Source: Authors.

Central Angle

$$\theta = 2\text{acos}\left[1 - \frac{2Y_c}{D}\right] \quad (23)$$

Hydraulic area:

$$A = \frac{D^2}{8}(\theta - \sin \theta) \quad (24)$$

Wet perimeter:

$$P = \frac{\theta D}{2} \quad (25)$$

Hydraulic radius:

$$R = \frac{D(\theta - \sin \theta)}{4\theta} \quad (26)$$

Mirror:

$$T = D \sin(\theta/2) \quad (27)$$

Hydraulic area derivative:

$$Ee = Y_c + \frac{V^2}{2g} \quad (28)$$

Newton Raphson Approach:

Function:

$$f(\theta) = \left[\sin\left(\frac{\theta}{2}\right)\right]^{\frac{1}{3}} [\theta - \sin \theta]^{-1} - \frac{A_{full}}{2\pi \left[\frac{Q^2 D}{g}\right]^{\frac{1}{3}}} = 0 \quad (29)$$

Derivative:

$$f'(\theta) = \left[-\left[\sin\left(\frac{\theta}{2}\right)\right]^{\frac{1}{3}} [\theta - \sin \theta]^{-2} [1 - \cos \theta] + \frac{1}{6} [\theta - \sin \theta]^{-1} \left[\sin\left(\frac{\theta}{2}\right)\right]^{-\frac{2}{3}} \left[\cos\left(\frac{\theta}{2}\right)\right]\right] \frac{d\theta}{dY_c} \quad (30)$$

Where:

$$\frac{d\theta}{dY_c} = \frac{4/D}{\sqrt{1 - \left[1 - \frac{2Y_n}{D}\right]^2}} \quad (31)$$

$$\theta_{n+1} = \theta_n - \frac{f(\theta_n)}{f'(\theta_n)} \quad (32)$$

$$\theta_{n+1} = \theta_n \quad (33)$$

$$\left[\sin\left(\frac{\theta_{cn}}{2}\right)\right]^{\frac{1}{3}} [\theta_{cn} - \sin \theta_{cn}]^{-1} - \frac{A_{full}}{2\pi \left[\frac{Q^2 D}{g}\right]^{\frac{1}{3}}} - \left[-\left[\sin\left(\frac{\theta_{cn}}{2}\right)\right]^{\frac{1}{3}} [\theta_{cn} - \sin \theta_{cn}]^{-2} [1 - \cos \theta_{cn}] + \frac{1}{6} [\theta_{cn} - \sin \theta_{cn}]^{-1} \left[\sin\left(\frac{\theta_{cn}}{2}\right)\right]^{-\frac{2}{3}} \left[\cos\left(\frac{\theta_{cn}}{2}\right)\right]\right] \frac{d\theta_{cn}}{dY_c}$$

Table 8. Yc solution (Excel – Newton-Raphson) (circular channel)

Iter.	Yc n+1	Area (m ²)	T (m)	dA/dYc	dT/dYc	f(Yc)	f'(Yc)	Newton Raphson
1	0.21035	3.24511	10.01341	0.08798	-1.8064238	0.259050819	13.28386	0.462796
2	0.25905	3.74104	10.46661	0.01824	-1.07705017	0.275984611	42.37605	0.419181
3	0.27598	3.92102	10.81060	0.00019	-0.92107472	0.276189028	31.17162	0.411050
4	0.27619	3.92323	10.81552	-0.00002	-0.91939261	0.276171857	29.35139	0.410796
5	0.27617	3.92304	10.81510	0.00000	-0.91953374	0.2762	29.29582	0.4108

Source: Authors.

```
Sub Calculo_Yc_Circular()

' Calcula El tirante critico para la seccion circular

Range("s29").GoalSeek Goal:=0, ChangingCell:=Range("ad29")
End Sub
```

Figure 12. Visual code (Excel). Iteration for Yc calculation

Fuente: Authors.

Figure 13. was constructed from the section factor for critical flow.

$$A^3T^{-1} = g^{-1}Q^2 \quad (34)$$

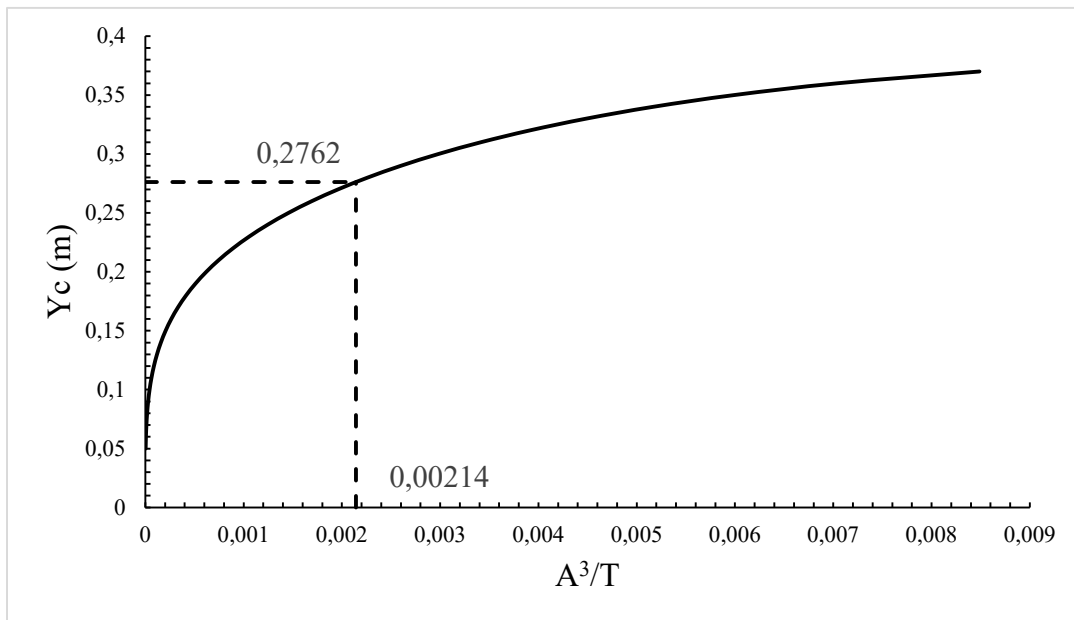


Figure 13. Circular pipe (graphic solution)

Fuente: Authors.

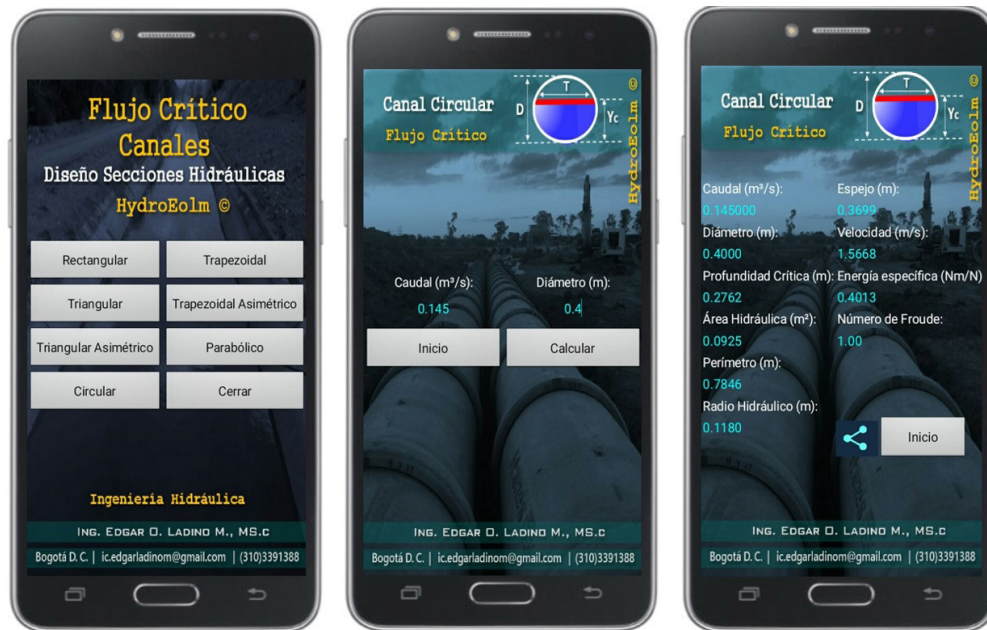


Figure 14. Circular channel, (Application critical depth calculation)
Source: Authors.

Table 9. Comparison of Y_c results (circular channel)

Parameter	Excel			
	Goal Seek	Newton Raphson	HCanales (Software)	Application (JavaScript)
Critical depth (m):	0.2762	0.2762	0.2762	0.2762
Mirror (m):	0.3699	0.3699	0.3699	0.3699
Hydraulic radius (m):	0.1180	0.1180	0.1180	0.1180
Specific energy (Nm/N):	0.4013	0.4013	0.4013	0.4013
Hydraulic area (m ²):	0.0925	0.0925	0.0925	0.0925
Perimeter (m):	0.7846	0.7846	0.7846	0.7846
Critical speed (m/s):	1.5668	1.5668	1.5668	1.5668
Froude number:	1.0000	1.0000	1.0000	1.0000

Source: Authors.

Finally, the application was submitted to some exercises development proposed in different Hydraulics books. In order to validate the algorithm developed, the results are presented

in tables 10, 11 and 12. Similarly, the results calculated by the Application are shown in figures 15, 16 and 17.

Table 10. Results comparison Exercise 3.5, Hydraulics of channels

Book	Exercise	Input parameters	Output parameters	Book	Application
Channel hydraulics (Sotelo, 2002)	3.5 (Pg. 195)	Flow (m ³ /s): 20	Critical depth (m):	1.1710	1.1710
		Base channel (m): 4	Critical velocity (m/s):	2.967	2.9668
		Talud (Z): 1.5	Specific energy (Nm/m):	1.62	1.6197

Source: Authors.

Table 11. Results comparison Exercise 4.2, Hydraulics of open channels

Book	Exercise	Input parameters	Output parameters	Book	Application
Hydraulics of open channels (Chow, 1994)	4.2 (Pg. 68)	Flow (m ³ /s): 11.32674	Critical depth (m):	0.6553	0.6547
		Base channel (m): 6.0960	Critical velocity (m/s):	2.3336	2.3362
		Talud (Z): 2	Specific energy (Nm/m):	0.9329	0.9329

Source: Authors.

Table 12. Results comparison Exercise 4.3, Hydraulics of open channels

Book	Exercise	Input parameters	Output parameters	Book	Application
Hydraulics of open channels (Chow, 1994)	4.3 (Pg. 68)	Flow (m ³ /s): 0.566334	Critical depth (m):	0.4389	0.4374
		Base channel (m): 0.9144	Critical velocity (m/s):	1.8174	1.8253
			Specific energy (Nm/m):	0.6072	0.6072

Source: Authors.



Figure 15. Exercise 3.5, Hydraulics of channels, Gilberto Sotelo (Application Critical depth calculation)
 Source: Authors.

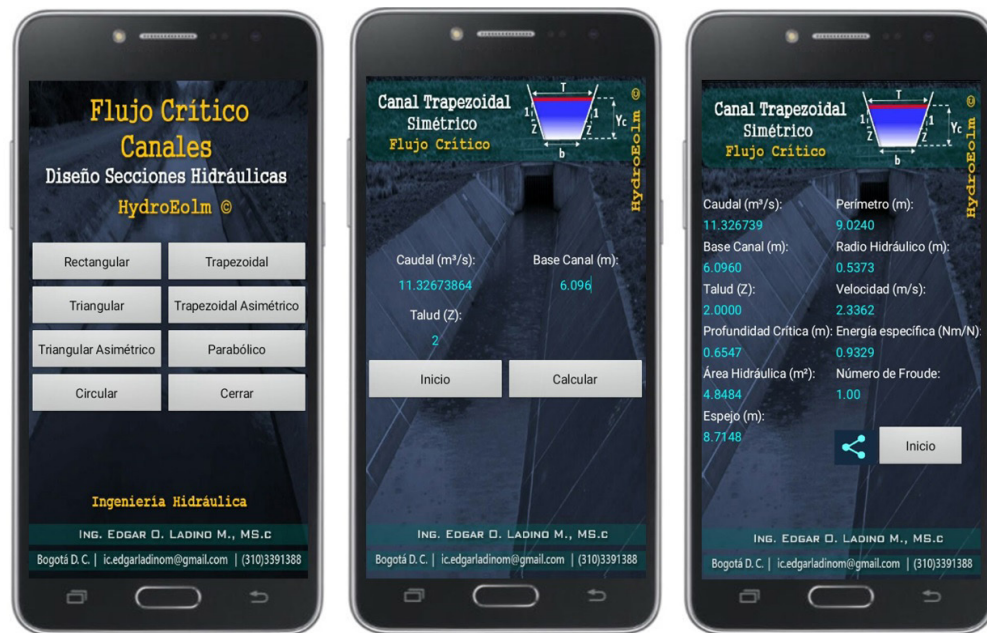


Figure 16. Exercise 4.2, Hydraulics of open channels, Ven Te Chow (Application Critical depth calculation)
 Source: Authors.

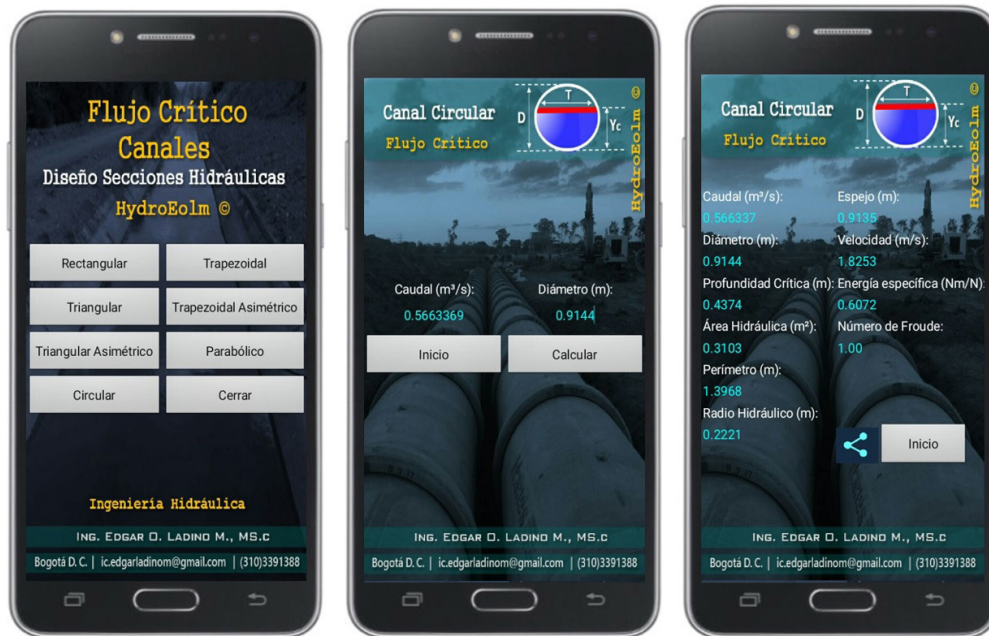


Figure 17. Exercise 4.3, Hydraulics of open channels, Ven Te Chow (Application Critical depth calculation)
Source: Authors.

CONCLUSIONS

The algorithm developed for the application "Diseño de Canales Hidráulicos HydroEolm" under JavaScript programming language avoids the use of calculation curves for critical depth. The results showed that the application effectively calculates the critical depth, critical speed, hydraulic area, specific energy, wet perimeter and the mirror.

In the application development, the results were compared with different exercises proposed in Hydraulics books, showing optimal outputs. Likewise, about 95 hydraulic exercises were performed, which were validated by comparing the application results against results obtained from three different methodologies (Goal Seek, Newton-Rapson, Hcanales®).

Finally, the development of algorithms for operating systems compatible with iOS and Windows is recommended, which expands

the coverage of the application to a greater number of users. This application has been downloaded in Colombia, Bolivia, Peru, Costa Rica and Algeria.

REFERENCES

- Chow, V. T. (1994). *Hidráulica de Canales Abiertos*. Bogotá D.C.: McGraw-Hill.
- Contreras, L.E., Escobar, I., & Trisancho, J.A. (2013). Estrategias educativas para el uso de las TIC en educación superior. *Tecnura*, 17, 161-173. doi:<https://doi.org/10.14483/22487638.7246>
- Diaz, J., & Benitez, F. (1998). *Introducción a los métodos numéricos para la resolución de ecuaciones*. Cádiz: Universidad de Cádiz.
- Drumea, A. (2012). Education in development of electronic modules using free and open source software tools. *Hidraulica*, (3/4), 54-60.

Gasca, M. C., Camargo, L. L., & Medina, B. (2014). Metodología para el desarrollo de aplicaciones móviles. *Tecnura*, 18(40), 20-35.

Gómez, R., Galvis, A., & Mariño, O. (1998). Ingeniería de software educativo con modelaje orientado por objetos: un medio para desarrollar micromundos interactivos. *Informática Educativa Uniandes Lidie*, 11(1), 9-30.

Jonoski, A., Alfonso, L., Almoradie, A., Popescu, I., Van Andel, S., & Vojinovic, Z. (2012). Mobile phone applications in the water domain. *Environmental Engineering and Management Journal*, 11, 919-930.

Lindley, C. (2013). *JavaScript Enlightenment*. Sebastopol: O'Reilly Media Inc.

Sotelo, F., & Solarte, M. F. (2014). Incorporación de recursos web como servicios de e-learning al sistema de gestión de aprendizaje. LRN: una revisión. *Tecnura*, 18(39), 165-180. doi:<https://doi.org/10.14483/udistrital.jour.tecnura.2014.1.a12>

Sotelo, G. (2002). *Hidráulica de Canales*. México: Facultad de Ingeniería de la UNAM.

Vidal, M., Gómez, F., & Ruiz, A. (2010). Software Educativos. *Educación Médica Superior*, 24(1). Retrieved from http://scielo.sld.cu/scielo.php?script=sci_arttext&pid=S0864-21412010000100012

