



Relation between the Branch-to-Node Incidence and the Triangular Matrices in Radial Distribution Networks

Oscar Danilo Montoya¹  , Walter Gil-González² , and Alexander Molina-Cabrera² 

¹Facultad de Ingeniería, Universidad Distrital Francisco José de Caldas. Bogotá, Colombia.


²Facultad de Ingeniería, Universidad Tecnológica de Pereira. Pereira, Colombia.

The power flow solution is a classical problem in electrical engineering which has been studied for more than 60 years (1). One of the most widely used methods corresponds to the Newton-Raphson approach, which is currently employed for analyzing power systems with meshed configurations and multiple generation sources, *i.e.*, it is typically employed for power systems at high-voltage levels (2). In the case of medium- and low-voltage levels, power flow analysis is performed with graph-based approaches that consider the radial topology of the network in order to propose derivative-free solution methods (3, 4). Said graph-based approaches reduce the processing times required to obtain the power flow solution because they do not use recursive matrix inversions during the iterative solution process, unlike derivative-based power flow methods (5).

Two of the most widely known power flow solution methodologies for radial distribution networks in medium-voltage levels are the backward/forward power flow (4) and the triangular-based power flow (3). Both methods are based on the tree structure that represents radial distribution networks. The main characteristic of both methods is that they are formulated using the branch-to-node (A_d) and the triangular (T) matrices. However, both solution methods are mathematically different. The power flow method based on the triangular matrix is only applicable to strictly radial electrical distribution networks. Still, it is possible to find an analytical relation between both matrices, as demonstrated in this editorial note.

Theorem 1. *The branch-to-node incidence matrix A and the upper-triangular matrix T are related through a negative inverse, including a transposed operation, *i.e.*,*

$$T = - [A_d^T]^{-1}. \tag{1}$$

*  Correspondence: odmontoyag@udistrital.edu.co

© The authors;
reproduction
right holder
Universidad
Distrital
Francisco José de
Caldas.

Open access



Proof. To demonstrate Equation (1), let us recur to the distribution grid presented in Fig. 1. Note that J_b represents the current flowing through line b , and I_k corresponds to the net demanded current at node k .

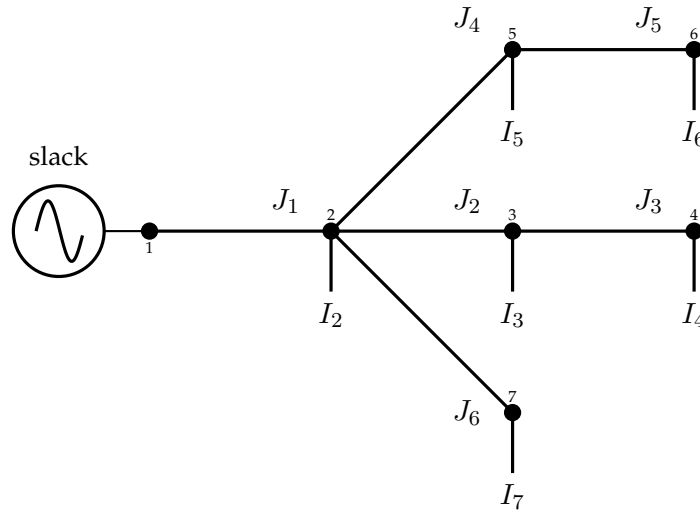


Figure 1. Single-line diagram equivalent for a radial distribution network with seven nodes

It is worth mentioning that the branch and nodal currents can be related using a matricial operation, as presented in Equation (2):

$$\begin{bmatrix} J_1 \\ J_2 \\ J_3 \\ J_4 \\ J_5 \\ J_6 \end{bmatrix} = \begin{bmatrix} 1 & 1 & 1 & 1 & 1 & 1 \\ 0 & 1 & 1 & 0 & 0 & 0 \\ 0 & 0 & 1 & 0 & 0 & 0 \\ 0 & 0 & 0 & 1 & 1 & 0 \\ 0 & 0 & 0 & 0 & 1 & 0 \\ 0 & 0 & 0 & 0 & 0 & 1 \end{bmatrix} \begin{bmatrix} I_2 \\ I_3 \\ I_4 \\ I_5 \\ I_6 \\ I_7 \end{bmatrix} \leftrightarrow \mathbb{J} = \mathbf{T}\mathbb{I}, \tag{2}$$

where \mathbb{J} is the vector that contains all the branch currents, and \mathbb{I} contains all the demanded currents, respectively.

Now, if the Kirchoff’s first law is applied to each node of the network, except to the substation node, i.e., node 1, as illustrated in Figure 1, the relation between nodal injected currents and branch currents is reached as presented in (3).

$$\begin{bmatrix} I_2 \\ I_3 \\ I_4 \\ I_5 \\ I_6 \\ I_7 \end{bmatrix} = - \begin{bmatrix} -1 & 1 & 0 & 1 & 0 & 1 \\ 0 & -1 & 1 & 0 & 0 & 0 \\ 0 & 0 & -1 & 0 & 0 & 0 \\ 0 & 0 & 0 & -1 & 1 & 0 \\ 0 & 0 & 0 & 0 & -1 & 0 \\ 0 & 0 & 0 & 0 & 0 & -1 \end{bmatrix} \begin{bmatrix} J_1 \\ J_2 \\ J_3 \\ J_4 \\ J_5 \\ J_6 \end{bmatrix} \leftrightarrow \mathbb{I} = \mathbf{A}_d^\top \mathbb{J} \tag{3}$$

For more details regarding the construction of the branch-to-node incidence matrix, please refer to (6). Now, in order to demonstrate that Equation (1) is true, if (3) is substituted into (2), then (4) is obtained:

$$\mathbb{J} = \mathbf{TA}_d^\top \mathbb{J}, \quad (4)$$

which clearly shows that

$$\mathbf{TA}_d^\top = \mathbf{1}_{l \times l}, \quad (5)$$

where l is the number of distribution lines in the distribution grid under analysis, *i.e.*, for Figure 1 $l = 6$. In addition, if the operation in (5) is made for matrices \mathbf{T} and \mathbf{A}_d^\top in (2) and (3), the following result is reached.

$$-\begin{bmatrix} 1 & 1 & 1 & 1 & 1 & 1 \\ 0 & 1 & 1 & 0 & 0 & 0 \\ 0 & 0 & 1 & 0 & 0 & 0 \\ 0 & 0 & 0 & 1 & 1 & 0 \\ 0 & 0 & 0 & 0 & 1 & 0 \\ 0 & 0 & 0 & 0 & 0 & 1 \end{bmatrix} \begin{bmatrix} -1 & 1 & 0 & 1 & 0 & 1 \\ 0 & -1 & 1 & 0 & 0 & 0 \\ 0 & 0 & -1 & 0 & 0 & 0 \\ 0 & 0 & 0 & -1 & 1 & 0 \\ 0 & 0 & 0 & 0 & -1 & 0 \\ 0 & 0 & 0 & 0 & 0 & -1 \end{bmatrix} = -\begin{bmatrix} 1 & 0 & 0 & 0 & 0 & 0 \\ 0 & 1 & 0 & 0 & 0 & 0 \\ 0 & 0 & 1 & 0 & 0 & 0 \\ 0 & 0 & 0 & 1 & 0 & 0 \\ 0 & 0 & 0 & 0 & 1 & 0 \\ 0 & 0 & 0 & 0 & 0 & 1 \end{bmatrix}, \quad (6)$$

which confirms that

$$\mathbf{T} = -[\mathbf{A}_d^\top]^{-1},$$

thus completing the proof. \square

Remark 1. The result in Equation (1) is particularly important for power flow studies since it demonstrates that, for strictly radial distribution grids, the branch-to-node incidence matrix \mathbf{A}_d and the upper-triangular matrix \mathbf{T} are related. This is, it will be possible to demonstrate that the upper-triangular power flow method is indeed a particular case of the classical and well-known backward/forward power flow method (7).

References

- [1] O. D. Montoya, A. Molina-Cabrera, and J. C. Hernández, "A comparative study on power flow methods applied to AC distribution networks with single-phase representation," *Electronics*, vol. 10, no. 21, p. 2573, Oct., 2021. <https://doi.org/10.3390/electronics10212573> ↑ 1
- [2] G. Li, X.-P. Zhang, and X.-F. Wang, "Accelerated newton-raphson power flow," *Eur. Trans. Elec. Power*, vol. 22, no. 4, pp. 504–517, Mar., 2011. <https://doi.org/10.1002/etep.579> ↑ 1
- [3] A. Marini, S. Mortazavi, L. Piegari, and M.-S. Ghazizadeh, "An efficient graph-based power flow algorithm for electrical distribution systems with a comprehensive modeling of distributed generations," *Elec. Power. Sys. Res.*, vol. 170, pp. 229–243, May., 2019. <https://doi.org/10.1016/j.epsr.2018.12.026> ↑ 1
- [4] T. Shen, Y. Li, and J. Xiang, "A graph-based power flow method for balanced distribution systems," *Energies*, vol. 11, no. 3, p. 511, Feb., 2018. <https://doi.org/10.3390/en11030511> ↑ 1

-
- [5] A. Garcés-Ruiz, "Power flow in unbalanced three-phase power distribution networks using Matlab: Theory, analysis, and quasi-dynamic simulation," *Ingeniería*, vol. 27, no. 3, p. e19252, Aug., 2022. <https://doi.org/10.14483/23448393.19252>↑ 1
- [6] M. C. Herrera-Briñez, O. D. Montoya, L. Alvarado-Barrios, and H. R. Chamorro, "The equivalence between successive approximations and matricial load flow formulations," *App. Sci.*, vol. 11, no. 7, p. 2905, Mar., 2021. <https://doi.org/10.3390/app11072905>↑ 3
- [7] S. Ouali and A. Cherkaoui, "An improved backward/forward sweep power flow method based on a new network information organization for radial distribution systems," *J. Elec. Comp. Eng.*, vol. 2020, pp. 1–11, Jan., 2020. <https://doi.org/10.1155/2020/5643410>↑ 3
-

Oscar Danilo Montoya

Compatibility and Electromagnetic Interference group, Department of Engineering, Universidad Distrital Francisco José de Caldas; Electrical Engineer, Master's in Electrical Engineering, and PhD in Engineering.

Email: odmontoyag@udistrital.edu.co

Walter Gil-González

Electromagnetic Fields and Energy Phenomena group, Department of Engineering, Universidad Tecnológica de Pereira; Electrical Engineer, Master's in Electrical Engineering, and PhD in Engineering.

Email: wjgil@utp.edu.co

Alexander Molina-Cabrera

Electromagnetic Fields and Energy Phenomena group, Department of Engineering, Universidad Tecnológica de Pereira; Electrical Engineer, Master's in Electrical Engineering, and PhD in Engineering.

Email: almo@utp.edu.co

